

535, 462

Rec'd PCT/PTO 17 MAY 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
WO 2004/047138 A2

(51) International Patent Classification<sup>7</sup>: H01J 17/49, 1/63

(21) International Application Number:  
PCT/IB2003/005112

(22) International Filing Date:  
10 November 2003 (10.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
102 54 175.2 21 November 2002 (21.11.2002) DE

(71) Applicant (for DE only): PHILIPS INTELLECTUAL  
PROPERTY & STANDARDS GMBH [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US):  
KONINKLIJKE PHILIPS ELECTRONICS N.V.  
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven  
(NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): JÜSTEL, Thomas

[DE/DE]; c/o Philips Intellectual Property & Standards  
GmbH, Weissshausstr. 2, 52066 Aachen (DE). MAYR,  
Walter [DE/DE]; c/o Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).  
SCHMIDT, Peter [DE/DE]; c/o Philips Intellectual Prop-  
erty & Standards GmbH, Weissshausstr. 2, 52066 Aachen  
(DE). SCHNICK, Wolfgang [DE/DE]; c/o Philips In-  
tellectual Property & Standards GmbH, Weissshausstr. 2,  
52066 Aachen (DE).


(74) Agent: MEYER, Michael; Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: PLASMA DISPLAY SCREEN WITH BLUE-EMITTING PHOSPHOR

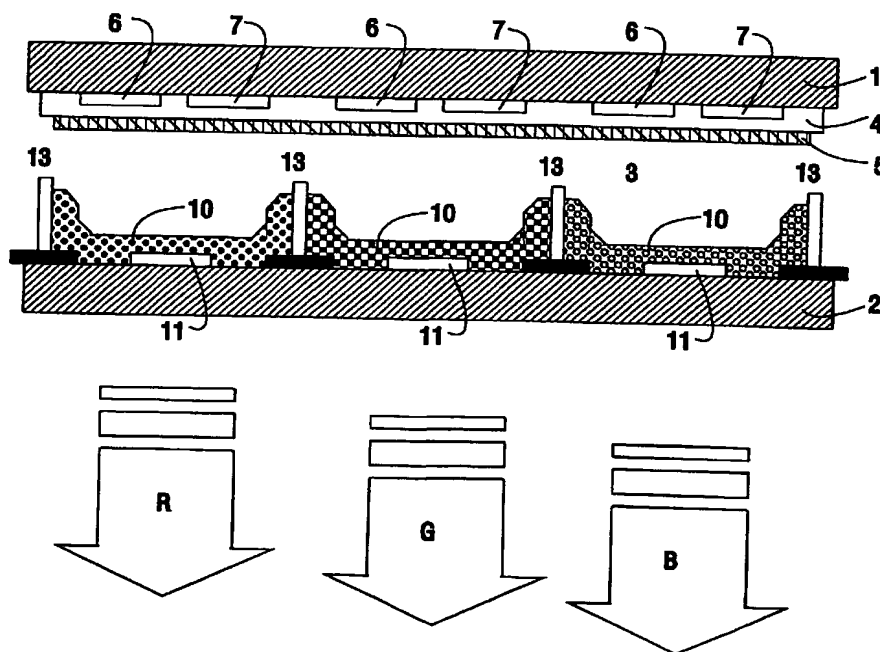

(57) Abstract: A plasma display screen comprising a carrier plate, a transparent front plate, a ribbed structure dividing the space between the carrier plate and the front plate into plasma cells, which are filled with a gas, one or more electrodes arrays for generating corona discharges in the plasma cells, and a phosphor layer comprising a blue-emitting phosphor of the general formula (La<sub>1-x-y</sub>Gd<sub>x</sub>)Si<sub>3</sub>N<sub>5</sub>:Cey, where 0 ≤ x < 1 and 0 < y < 0.1.

WO 2004/047138 A2



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

## Plasma display screen with blue-emitting phosphor

The invention relates to a plasma display screen comprising a carrier plate, a transparent front plate, a ribbed structure which divides the space between the carrier plate and the front plate into plasma cells, which are filled with a gas, one or more electrode arrays to generate corona discharges in the plasma cells, and a phosphor layer comprising a blue-emitting phosphor.

The principle on which a plasma display screen is based is that a high voltage in a gas with a low gas pressure generates electromagnetic radiation, which may be visible itself or which can be converted into visible light by phosphors.

In a color plasma display screen of customary design, the gas filling is composed of an inert gas, for example xenon, or an inert gas mixture, for example a mixture of helium, neon and xenon. The discharge process involves the generation of ultraviolet radiation in the VUV range, i.e. radiation having a wavelength below 200 nm. This VUV radiation excites the red, green and blue-emitting phosphors (RGB phosphors) in the phosphor layer, thereby causing them to emit visible light in the colors red, green and blue. Thus, unlike conventional fluorescent lamps, the luminescent materials in plasma display screens use the high-energy side of the UV spectrum. Dependent upon the composition of the inert gas mixture and the gas pressure, the VUV emission consists of a single line at 147 nm or of a broad excimer band with a maximum at 172 nm. What results from this is that new demands are imposed on the RGB phosphors in a plasma display screen.

The RGB phosphors constitute the final member of the energy-transfer chain wherein electric energy is converted into visible light in the plasma display screen. The efficiency of a plasma display screen with a phosphor layer is ultimately determined by the electro-optical efficiency of the phosphors, i.e. how completely the visible UV light generated is absorbed in the phosphor and how completely the visible light generated subsequently leaves the plasma display screen in the direction of the viewer.

Among the blue-emitting phosphors europium(II)-activated barium magnesium aluminate is unsurpassed in terms of color properties and electro-optical efficiency. What is problematic, however, is that it is subject to comparatively strong degradation under the influence of VUV radiation. Said degradation is particularly strong

under the influence of VUV radiation having a wavelength below 200 nm, and manifests itself as a deterioration of the electro-optical efficiency and a shift of the color point in the green range.

WO 99/34389 discloses a plasma display screen with a phosphor of the  
5 general formula  $Ba_{1-e}Eu_eMn_mMg_{1+8-m}Al_{10+2f}O_{17+8+3f}$ , which exhibits a reduced color shift during the service life of the display screen.

The degradation and color shift of europium(II)-activated barium magnesium aluminate already begins, however, in the production process of the plasma display screen, in which the phosphor layer is exposed to temperatures of 500°C and higher.

10 It is an object of the invention to provide a plasma display screen comprising a carrier plate, a transparent front plate, a ribbed structure dividing the space between the carrier plate and the front plate into plasma cells, which are filled with a gas, one or more electrode arrays for generating corona discharges in the plasma cells, and a phosphor layer comprising a blue-emitting phosphor, which plasma display screen is characterized by  
15 temperature stability, an improved, faithful color rendition and a higher brightness.

In accordance with the invention, this object is achieved by a plasma display screen comprising a carrier plate, a transparent front plate, a ribbed structure dividing the space between the carrier plate and the front plate into plasma cells, which are filled with a gas, one or more electrodes arrays for generating corona discharges in the plasma cells, and a  
20 phosphor layer comprising a phosphor of the general formula  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ .

In such a plasma display screen, the blue dot has been shifted to attain a higher color saturation. This has an influence not only on the blue tones but also on all intermediate tones on the blue-green and blue-red lines which can be reached as a result of the  
25 enlargement of the display triangle in the blue range. By virtue thereof, a more faithful display of many color tones is possible, resulting in a visible difference. In addition, the color contrast under bright ambient light conditions is increased.

In accordance with a preferred embodiment, the phosphor layer comprises the blue-emitting phosphor  $LaSi_3N_5:Ce$ .

30 The invention also relates to a phosphor layer comprising a blue-emitting phosphor of the general formula  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ . Such a phosphor layer can suitably be used as a phosphor layer in light-emitting diodes, particularly UV-LEDs, and in gas discharge lamps. Said phosphor layer is insensitive to thermal loads.

The invention further relates to a phosphor  $(\text{La}_{1-x-y}\text{Gd}_x)\text{Si}_3\text{N}_5\text{O}_v\text{F}_w:\text{Ce}_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ .

This phosphor is characterized by improved thermal loadability, particularly in an oxygen-containing atmosphere, as compared to Eu(II)-activated barium magnesium aluminate, which can be attributed to the fact that the oxidation reaction of the cerium(III) ion to the cerium(IV) ion has a very high activation energy. As a result, the  $\text{Ce}^{3+}$ -activated nitridosilicate phosphors are thermo and photo-stable.

As a result, also the luminance of this phosphor is not adversely affected in the manufacturing process of the plasma display screen, and the efficiency remains constant for a very long period of time also in the case of excitation by VUV radiation, such as occurs inter alia in, for example, low-pressure gas discharge lamps and VUV-LEDs. Like all cerium(III)-doped phosphors, also said phosphor is further characterized by a very good excitability by UV radiation and by a short decay time  $t_{1/10}$  in the range between 2 and 10 ms.

In accordance with a preferred embodiment, the invention relates to a phosphor of the general formula  $(\text{La}_{1-x-y}\text{Gd}_x)\text{Si}_3\text{N}_5:\text{Ce}_y$ , where  $0 \leq x < 1$  and  $0.01 < y < 0.1$ .

These and other aspects of the invention are apparent from and will be elucidated with reference to a drawing and an example.

In the drawing:

Fig. 1 is a diagrammatic cross-sectional view of a plasma display screen.

The principle on which all types of plasma displays are based is light excitation by UV radiation from a gas discharge. Plasma displays can be divided into DC-addressed display screens and AC-addressed display screens. The difference between them relates to the type of current limitation.

Fig. 1 shows an example of a plasma cell of an AC plasma display. Such an AC plasma display screen is composed of a transparent front plate 1 and a carrier plate 2, which are arranged at a distance from each other and are hermetically sealed at the periphery. The space between the two plates constitutes the discharge space 3 which is bounded by the protective layer and the phosphor layer. Customarily, the front plate as well as the carrier

plate are made of glass. Individually drivable plasma cells are formed by a ribbed structure 13 having separating ribs. A plurality of transparent picture electrodes 6, 7 are arranged in the form of stripes on the front plate. The associated control electrodes 11 are provided at right angles thereto on the carrier plate, so that a discharge can be ignited at each one of the crossing points.

The discharge space is filled with an appropriate discharge gas, for example xenon, a xenon-containing gas, neon or a neon-containing gas. The gas discharge is ignited between the picture electrodes 6, 7 on the front plate. To preclude direct contact between the plasma and the picture electrodes 6, 7, the latter are covered with a dielectric layer 4 and a protective layer 5. In the discharge zone, the gas is ionized and a plasma develops which emits VUV radiation.

Dependent upon the composition of the gas in the plasma cell, the spectral intensity of the gas discharge changes. Gas mixtures containing less than 30% by volume xenon emit predominantly resonance radiation at 147 nm, gas mixtures containing more than 30% by volume xenon emit excimer radiation at 172 nm.

The emitted VUV radiation excites pixel-structured red, green and blue phosphors, thereby causing them to emit light in the visible range, as a result of which a color impression is generated. The pixels of the plasma display screen in the three primary colors red, blue and green are formed by a phosphor layer 10 on at least a part of the carrier plate and/or on the walls of the separating ribs in the plasma cells. The plasma cells are each coated with in succession a red, green or blue phosphor. Three juxtaposed plasma cells represent one pixel, which enables all colors to be displayed by mixing said three primary colors.

The phosphor for generating the blue primary color of the general formula is, in accordance with the invention,  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ .

The cerium(III)-activated nitridosilicate  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ , is based on a nitridosilicate host lattice having the composition  $LnSi_3N_5$ . Said host lattice forms a three-dimensional lattice of interlinked  $SiN_4$  tetrahedrons, in which the Ln ions lanthanum(III) and/or gadolinium(III) are included.

The host lattice is doped with less than 10% cerium as an activator. In comparison with oxidosilicate host lattices, the covalent fraction of the bonds and hence the ligand field intensity is increased by the inclusion of nitrogen into the host lattice. Thus, in

comparison with the oxidosilicates, the excitation and emission bands are shifted to longer wavelengths.

The doped cerium(III)-activated  $(\text{La}_{1-x-y}\text{Gd}_x)\text{Si}_3\text{N}_5\text{O}_v\text{F}_w:\text{Ce}_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ , are prepared in accordance with conventional methods, for example by a solid-state reaction. In such a method, the oxides or carbonates are used as the starting compound. They are mixed, ground and subsequently sintered. As a result, phosphors with a uniform crystal structure are obtained in the form of fine-grain particles having a grain size in the range of 1 to 10  $\mu\text{m}$ .

To manufacture the phosphor layer use can be made of dry coating methods, for example electrostatic deposition or electrostatically assisted dusting, as well as wet coating methods, for example screen printing, dispenser methods, wherein a suspension is introduced using a nozzle moving along the channels, or sedimentation from the liquid phase.

For the wet coating methods, the phosphors must be dispersed in water, an organic solvent, if necessary in combination with a dispersing agent, a tenside and an anti-foaming agent or a binder preparation. Organic and inorganic binders capable of withstanding an operating temperature of 250°C without being subject to decomposition, embrittlement or discoloration can suitably be used as the binder preparations for plasma display screens.

Although the invention has been described with reference to an AC color plasma display screen, the application of the invention is not limited to this type of plasma display screen, but also includes, for example, DC color plasma display screens and monochromatic AC and DC plasma display screens.

#### Example 1

To prepare  $\text{LaSi}_3\text{N}_5:\text{Ce}$ , a quantity of 11.51 g (191.60 mmol)  $\text{SiO}_2$ , 10.00 g (30.70 mmol)  $\text{La}_2\text{O}_3$ , 5.584 g (464.96 mmol) graphite powder and 1.22 g (0.62 mmol)  $\text{CeF}_3$  are homogeneously mixed, suspended in ethanol and stirred at room temperature for 2 hours. Next the suspension is dried and filled into a corundum boat. This is heated in a tubular furnace in a gas flow of 95% nitrogen and 5% hydrogen to a temperature of 1250°C within one hour. This temperature is maintained for 2 hours. Subsequently, nitrogen is added to the reducing gas flow and the heating process is continued for three hours at 1450°C. Next, said corundum boat is allowed to cool to room temperature in a reducing gas flow. As a result, a blue-emitting phosphor of the composition  $\text{LaSi}_3\text{N}_5:\text{Ce}$  is obtained.

Using the phosphor thus prepared, a plasma display screen in accordance with the known methods was manufactured and tested.



## CLAIMS:

1. A plasma display screen comprising a carrier plate, a transparent front plate, a ribbed structure dividing the space between the carrier plate and the front plate into plasma cells, which are filled with a gas, one or more electrodes arrays for generating corona discharges in the plasma cells, and a phosphor layer comprising a blue-emitting phosphor of the general formula  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ .  
5
2. A plasma display screen as claimed in claim 1, characterized in that the phosphor layer comprises the blue-emitting phosphor  $LaSi_3N_5$ .  
10
3. A phosphor layer comprising a blue-emitting phosphor of the general formula  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ .
4. A phosphor of the general formula  $(La_{1-x-y}Gd_x)Si_3N_5O_vF_w:Ce_y$ , where  $0 \leq x < 1$ ,  $0 < y < 0.1$ ,  $0 \leq v < 0.1$  and  $0 \leq w < 0.1$ .  
15
5. A phosphor of the general formula  $(La_{1-x-y}Gd_x)Si_3N_5:Ce_y$ , where  $0 \leq x < 1$  and  $0.01 < y < 0.1$ .

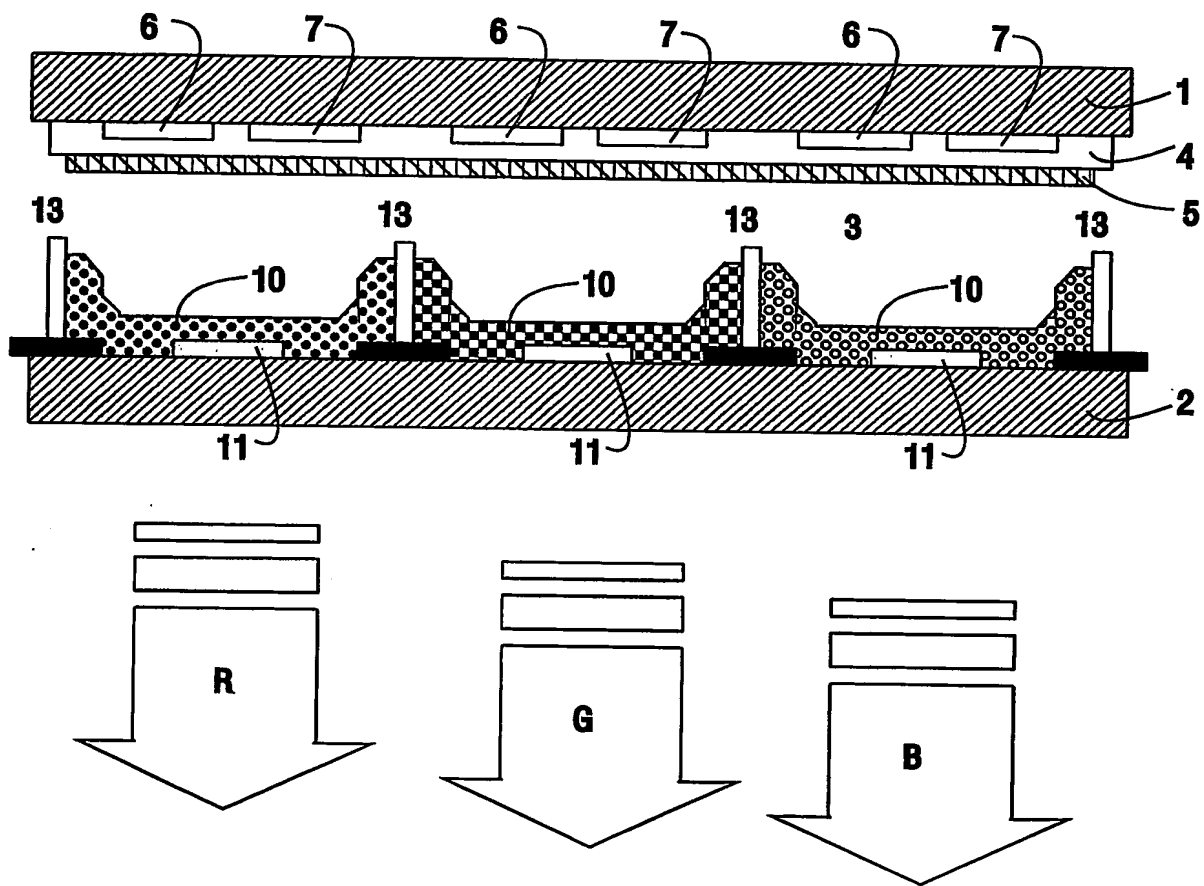


FIG.1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/047138 A3**

(51) International Patent Classification<sup>7</sup>: **H01J 17/49**,  
1/63, C09K 11/77, H01J 17/49

(NL). LUMILEDS LIGHTING U.S., LLC [US/US]; 370  
W. Trimble Road, MS 91 UK, San Jose, CA 95131 (US).

(21) International Application Number:  
PCT/IB2003/005112

(72) Inventors; and

(22) International Filing Date:  
10 November 2003 (10.11.2003)

(75) Inventors/Applicants (for US only): JÜSTEL, Thomas  
[DE/DE]; c/o Philips Intellectual Property & Standards  
GmbH, Weissshausstr. 2, 52066 Aachen (DE). MAYR,  
Walter [DE/DE]; c/o Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).  
SCHMIDT, Peter [DE/DE]; c/o Philips Intellectual Prop-  
erty & Standards GmbH, Weissshausstr. 2, 52066 Aachen  
(DE). SCHNICK, Wolfgang [DE/DE]; c/o Philips In-  
tellectual Property & Standards GmbH, Weissshausstr. 2,  
52066 Aachen (DE).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
102 54 175.2 21 November 2002 (21.11.2002) DE

(74) Agent: MEYER, Michael; Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).


(71) Applicant (for DE only): PHILIPS INTELLECTUAL  
PROPERTY & STANDARDS GMBH [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,

(71) Applicants (for all designated States except DE, US):  
KONINKLIJKE PHILIPS ELECTRONICS N.V.  
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven

[Continued on next page]

(54) Title: PLASMA DISPLAY SCREEN WITH BLUE-EMITTING PHOSPHOR

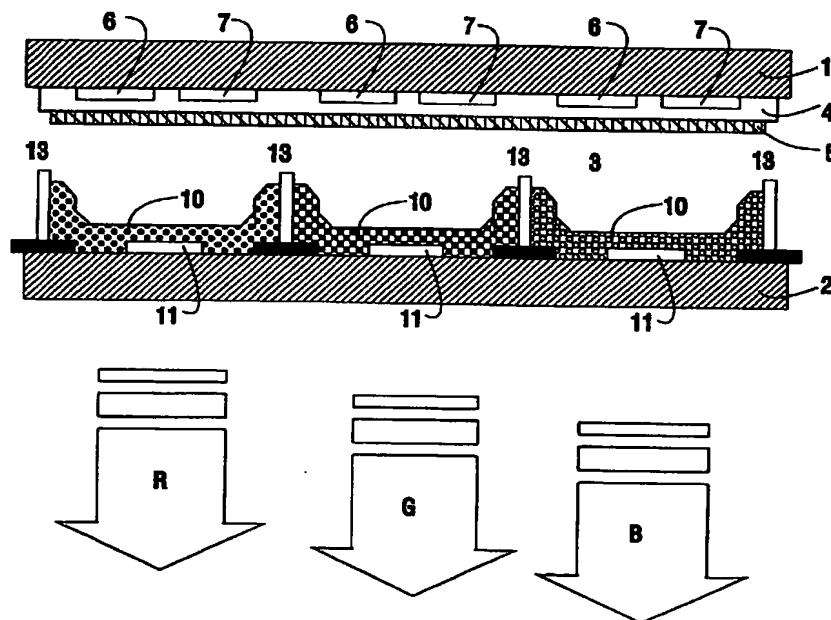

(57) Abstract: A plasma display screen comprising a carrier plate (2), a transparent front plate (1), a ribbed structure (13) dividing the space between the carrier plate (2) and the front plate (1) into plasma cells, which are filled with a gas, one or more electrodes arrays for generating corona discharges in the plasma cells, and a phosphor layer (10) comprising a blue-emitting phosphor of the general formula  $(La_{1-x}Y_x)Si_3N_5:Cey$ , where  $0 < x < 1$  and  $0 < y < 0.1$ .



RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TI, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

**(88) Date of publication of the international search report:**

16 June 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

Internat Application No  
PC 03/05112

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01J17/49 H01J1/63 C09K11/77 H01J17/49

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09K H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, CHEM ABS Data, PAJ, WPI Data, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	EP 1 296 376 A (PATENT-TREUHAND-GESELLSCHAFT FUER ELEKTRISCHE GLUEHLAMPEN MBH) 26 March 2003 (2003-03-26) claims 1,25; table 3	3-5
A	EP 1 104 799 A (OSRAM OPTO SEMICONDUCTORS GMBH & CO. OHG) 6 June 2001 (2001-06-06) the whole document	1-5
	----- -/-- -----	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A' document defining the general state of the art which is not considered to be of particular relevance
- \*E' earlier document but published on or after the international filing date
- \*L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O' document referring to an oral disclosure, use, exhibition or other means
- \*P' document published prior to the international filing date but later than the priority date claimed

- \*T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&' document member of the same patent family

Date of the actual completion of the international search

21 April 2005

Date of mailing of the international search report

02/05/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lehnert, A

## INTERNATIONAL SEARCH REPORT

Intern

Application No

PC

03/05112

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE CAPLUS 'Online!  CHEMICAL ABSTRACTS SERVICE, COLUMBUS,  OHIO, US; 15 July 1999 (1999-07-15),  UHEDA, KYOTA ET AL: "Synthesis and  photoluminescence of the ceramic phosphors  using LaSi<sub>3</sub>N<sub>5</sub> as a host lattice"  XP002325579  retrieved from STN  Database accession no. 1999:434985  abstract  &amp; KIDORUI, 34, 220-221 CODEN: KIDOEP;  ISSN: 0910-2205, 1999,</p> <p>-----</p>	1-5
A	<p>VAN KREVEL J W H ET AL: "Long wavelength  Ce<sup>3+</sup> emission in Y-Si-O-N materials"  JOURNAL OF ALLOYS AND COMPOUNDS, ELSEVIER  SEQUOIA, LAUSANNE, CH,  vol. 268, no. 1-2,  27 March 1998 (1998-03-27), pages 272-277,  XP004130688  ISSN: 0925-8388  the whole document</p> <p>-----</p>	1-5
A	<p>US 5 292 489 A (FANELLI ET AL)  8 March 1994 (1994-03-08)  the whole document</p> <p>-----</p>	1-5
P,X	<p>PATENT ABSTRACTS OF JAPAN  vol. 2003, no. 08,  6 August 2003 (2003-08-06)  &amp; JP 2003 096446 A (NATIONAL INSTITUTE FOR  MATERIALS SCIENCE),  3 April 2003 (2003-04-03)  abstract</p> <p>-----</p>	1-5

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern:

Application No

PCT/JP 03/05112

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1296376	A	26-03-2003	DE 10147040 A1	24-04-2003
			EP 1296376 A2	26-03-2003
			JP 2003206481 A	22-07-2003
			US 2003094893 A1	22-05-2003
EP 1104799	A	06-06-2001	EP 1104799 A1	06-06-2001
			AT 287435 T	15-02-2005
			CA 2359896 A1	07-06-2001
			CA 2360330 A1	07-06-2001
			CN 1337988 A	27-02-2002
			CN 1337989 A	27-02-2002
			DE 60017596 D1	24-02-2005
			WO 0140403 A1	07-06-2001
			WO 0139574 A1	07-06-2001
			EP 1238041 A1	11-09-2002
			EP 1153101 A1	14-11-2001
			HU 0105080 A2	29-04-2002
			HU 0200436 A2	29-06-2002
			JP 2003515655 T	07-05-2003
			JP 2003515665 T	07-05-2003
			TW 581801 B	01-04-2004
			TW 524840 B	21-03-2003
			US 2003024438 A1	06-02-2003
			US 2003020101 A1	30-01-2003
US 5292489	A	08-03-1994	NONE	
JP 2003096446	A	03-04-2003	NONE	